(12) **UK Patent Application** (19) **GB** (11) **2 178 625 A**

(21) Application No **8530653**

(22) Date of filing **17 Apr 1985**

(30) Priority data

    (31) **601711**   (32) **18 Apr 1984**   (33) **US**

(86) International application data
    PCT/US85/00689 En 17 Apr 1985

(87) International publication data
    WO85/05000 En 7 Nov 1985

(51) INT CL⁴ (as given by ISA)
    H04M 3/50

(52) Domestic classification (Edition I)
    H4K FD FQ

(56) Documents cited by ISA

US	4420656	US	4255618
US	4359607	US	4066847
US	4328396	US	4032712
US	4277649	US	3920908

(58) Field of search by ISA
    US 179/2CA 6.02, 6.03, 6.04, 6.05, 6.08, 6.14, 6.17, 18B,
    27D, 27FG, 27FH, 84C

(71) Applicant
    Golden Enterprises Inc.,

    (Incorporated in USA—Florida),
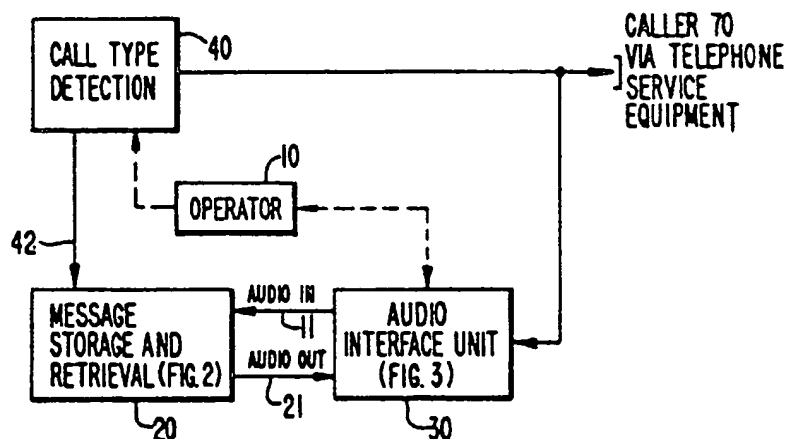
    1706 Wickham Road, Melbourne, Florida 32931, United
    States of America

(72) Inventors
    Walter W. Winter,   John H. Drew
    Steven E. Gothard,

(74) Agent and/or Address for Service
    J. A. Kemp & Co., 14 South Square, Gray's Inn, London
    WC1R 5EU

(54) **Telephone operator voice storage and retrieval system**

(57) A telephone operator voice storage and retrieval system is capable of presenting to the caller a response message in the actual voice of the operator on duty at the time. The operator (10) is also able to follow-up a played-back recorded message with a conversation with the caller (70), without the caller detecting a change in the characteristics of the caller's perceived operator voice. A storage and retrieval unit (20) employs a voice analyzer/synthesizer (32) coupled between a response message memory (51) and an audio interface (30) to the operator's audio equipment (headset). After the storage of a series of response messages, prepared by the operator, the system is ready for use in answering incoming calls. In this playback mode, as incoming calls are monitored, the appropriate operator's voice enunciated response message is accessed from memory and, via the voice synthesizer and an audio interface, that message is played back to the caller. When the caller speaks again, the operator who has been on-line the entire time but has been relieved of the need to actually recite the response phrase, now proceeds to converse with the caller. The audio interface contains automatic level control circuitry (103) which ensures that there is effectively no difference in the recorded voice played back to the caller and the 'live' voice spoken by the operator. As a result, the storage and retrieval system is listener transparent.

GB 2 178 625 A